ENTRYDOORS





For Your Multi-Family Project Think Madero

Balcony Storage | Front Entry | Garage Entry



Table of Contents 2025-2026

	DESIGNER ENTRY DOOR SYSTE
4	Spotlite Model 842 - 5 Lite
5	Narrow Lite
6_	4 Lite
7	Spotlite Model 840 - 3 Lite
	I
	ENTRY DOOR SYSTEMS
8	Ranger
10	Economy
12	Basic
14	Maverick
16	Dakota
18	Titan
20	Workhorse Steel
22	Workhorse Fiberglass
22	GARDEN PATIO DOORS
27	EXTERIOR GLASS OPTIONS
	SPECIFICATIONS
30	Pre-Finishing
32	Add-Ons
34	Door Specifications
36	Frame Specifications
38	Checklist for Ordering
50	Shoomist for ordering



ENTRY



Built for the Canadian Climate

Madero's Entry Series door systems are tailored to withstand the extreme Canadian climate. A versatile program featuring single exterior door openings used throughout your home and yard. Steel and fiberglass slabs are partnered with wood, composite or aluminum clad frames. Madero doors are built with quality and performance in mind, with options to fit your style and budget.

DESIGNER ENTRY


Designer Entry Series

Modern designs with the functionality of the Entry Collection. Madero offers a popular line-up of entry doors that provide the utmost street appeal. Our doors are built with quality and performance in mind; perfect for all single openings. For designer options to fit your style and budget - choose Madero.

Black & White Series


This system features a factory Polytex finish: black on the exterior, white on the interior. The frame is clad with black aluminum to the exterior and is complete with slimline aluminum brickmould. Available as inswing only.

M DESIGNER ENTRY

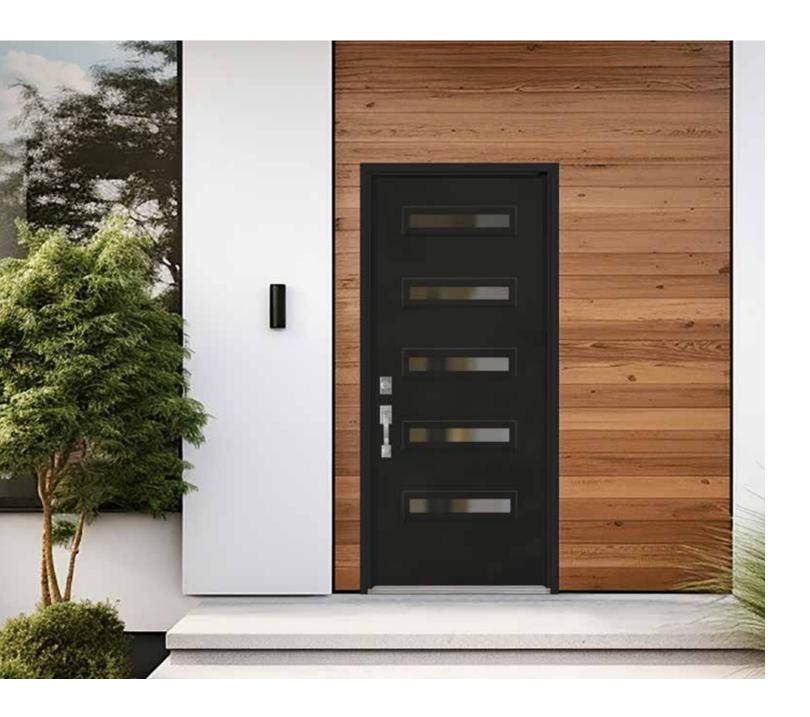

Spotlite Model 842 - 5 Lite

Architectural style is what gives a home its character. The Spotlite Model 842 features five 22" x 3" factory-installed horizontal inserts. Available in Clear or Frosted glass. This image showcases the Black & White series.

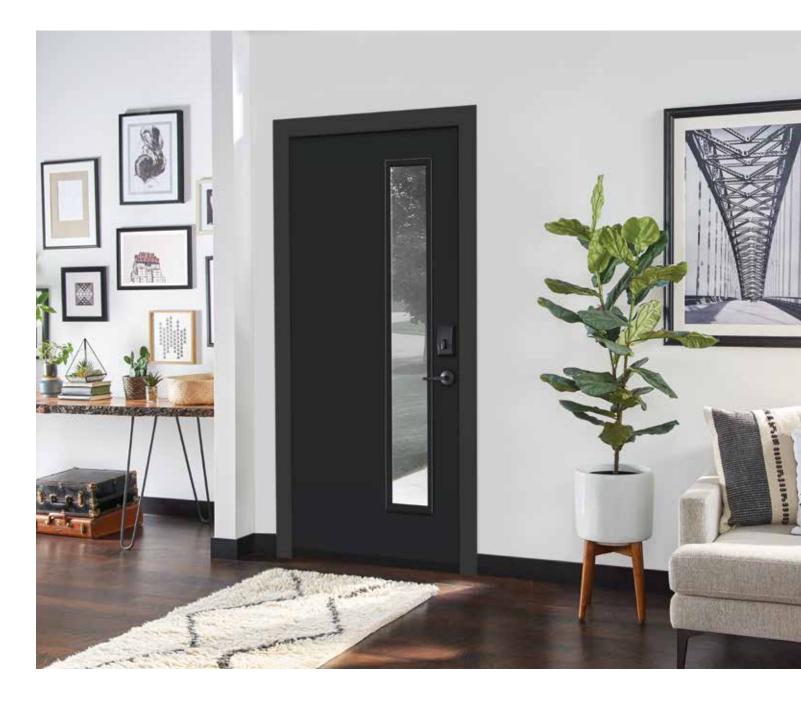

Narrow Lite

Trends come and go, good designs last. The Narrow Lite features a 7" x 64" insert installed on either the left or right hand side of your door. Available in factory-installed Clear or Frosted glass. This image showcases black painting inside and out.

M DESIGNER ENTRY



4 Lite

A 4 Lite door system creates a statement both inside and out. This style wins as the designer's choice every time. When choosing Frosted Low E glass, the unit gives complete privacy while still allowing light to filter through. Clear Low E provides maximum viewing to your outdoor space. This photo showcases optional factory painting in Ash.



Spotlite Model 840 - 3 Lite

A retro look that is even more popular today than it was back then. The Model 840 3 Lite features 12" x 12" factory-installed inserts centered in the door.

Available in Clear or Frosted glass.






THE RANGER

THE NEW AFFORDABLE RANGER DOOR SERIES FROM MADERO.

A primed 24 gauge steel door prehung in a high performance wood frame. The polyurethane core provides energy efficiency.



STEEL: 6 Panel, 24 gauge steel door, primed ready to paint.

DRILLING: Available with double drilling only. Complete with mortised face plate for superior hardware installation. Inswing only.

WOOD FRAME

STEEL SLAB

Kiln dried, finger jointed primed pine available in 4-9/16" or 6-9/16" jamb depth.

WEATHERSEALS

FIXED SILL: Extruded aluminum in mill finish with composite substrate.

SILL GASKETS: Prevents rain penetration and avoids messy caulking.

DOOR SHOE: Adjustable PVC door shoe with rain cap.

CORNER PAD: Simple solution corner pad helps eliminate air and water leaks.

WEATHERSTRIPPING: Black

HINGES

Ball bearing hinges in zinc finish.

WARRANTY

1 year limited manufacturer's warranty on door slab.

PACKAGING - Limited





RETAIL PACKAGED ACCESSORIES

 Brickmould sold separately in Retail pack.



· Jamb Extension Kit Individually boxed for retail

Contains:

- 2" Primed FJ Pine jamb profiled and cut to length
- 2" aluminum jamb extension to affix to any Madero door sill.





ECONOMY

High-Definition Steel Slab Wood Frame

The Economy entry level unit, designed specifically for garages and outbuildings, combines a primed steel inswing 6 panel door with a wood frame.



STEEL SLAB

SIZES: Width: 2/8, 3/0 - Height: 6/8

STEEL: 6 panel import, 24 gauge primed warm white steel slab with primed wood stiles, wood top rail and composite bottom rail. Polyurethane core with 12" wood lock block.

DRILLING: Available with double drilling only. Complete with mortised face plate for superior hardware installation. Inswing only.

WOOD FRAME

Kiln dried, finger jointed primed pine available in 4-9/16" or 6-9/16" jamb depth. Available with or without 180 Step Brickmould. Must specify at time of ordering.

WEATHERSEALS

FIXED SILL: Extruded aluminum in mill finish with composite substrate.

SILL GASKETS: Prevent rain penetration and avoids messy caulking.

DOOR SHOE: Premium white vinyl adjustable shoe.

CORNER PAD: Simple solution corner pad helps eliminate air and water leaks.

WEATHERSTRIPPING: Black

HINGES

Ball bearing hinges in zinc finish.

WARRANTY

5 year limited manufacturer's warranty on door slab. 5 year limited manufacturer's warranty on frame and components if painted within 45 days of purchase.

DOOR DESIGNS AVAILABLE





6 Panel only



BASIC

High-Definition Steel Slab Wood Frame

The Basic offers style, function and most importantly, affordability. It features high definition bright white steel combined with a wood frame for an economical and steadfast entry solution.



STEEL SLAB

SIZES: Width: 2/6 (6 panel only), 2/8, 2/10, 3/0 - Height: 6/8

STEEL: 24 gauge primed high definition steel, bright white, with primed wood stiles and rails. Polyurethane core with 12" wood lock block.

DRILLING: Available in single or double drilled. Complete with mortised face plate for superior hardware installation.

Available in inswing and outswing.

GLASS

Glass inserts can be factory installed in the 6 panel 23"x37" cutout, the flush 20"x64" / 22"x64" cutout or the 2 panel 23"x37" cutout. For designs refer to page 23.

WOOD FRAME

Kiln dried, finger jointed primed pine available in 4-9/16" or 6-9/16" jamb depth. Brickmould factory installed.

FRAME CLADDING

Available with white or black aluminum cladding (exterior of jamb only) with optional slimline aluminum brickmould. Not available in outswing units.

WEATHERSEALS

FIXED SILL: Extruded aluminum in mill finish with composite substrate.

SILL GASKETS: Prevents rain penetration and avoids messy

DOOR SHOE: Premium white vinyl adjustable shoe.


CORNER PAD: Simple solution corner pad helps eliminate air and water leaks.

WEATHERSTRIPPING: Black

HINGES

Ball bearing hinges in zinc finish.

DOOR DESIGNS AVAILABLE

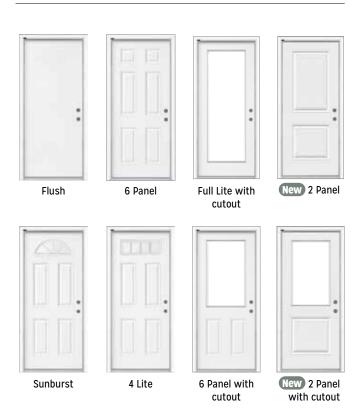

WARRANTY

5 year limited manufacturer's warranty on door slab. 5 year limited manufacturer's warranty on frame and components if painted within 45 days of purchase.





MAVERICK

Smooth White Fiberglass Slab Wood Frame

The Maverick is suitable for residential applications, outbuildings or garage needs. It has the benefits of a maintenance-free fiberglass door slab with a time trusted wood frame.



FIBERGLASS SLAB

SIZES: Width: 2/8, 2/10, 3/0 - Height: 6/8

FIBERGLASS: Smooth white pre-pigmented fiberglass, composite stiles and rails, polyurethane core and full length steel reinforced wood lock block.

DRILLING: Available in single or double drilled. Complete with mortised face plate for superior hardware installation.

Available in inswing and outswing.

GLASS

Glass inserts can be factory installed in the 6 panel 23"x37" cutout, or the flush 20"x64" / 22"x64" cutout. For designs refer to page 23.

WOOD FRAME

Kiln dried, finger jointed primed pine available in 4-9/16" or 6-9/16" jamb depth. Brickmould factory installed.

FRAME CLADDING

Available with white or black aluminum cladding (exterior of jamb only) with optional slimline aluminum brickmould. Not available in outswing units.

WEATHERSEALS

FIXED SILL: Extruded aluminum in mill finish with composite substrate.

SILL GASKETS: Prevents rain penetration and avoids messy caulking.

DOOR SHOE: Premium white vinyl adjustable shoe.


CORNER PAD: Simple solution corner pad helps eliminate air and water leaks.

WEATHERSTRIPPING: Black

HINGES

Ball bearing hinges in zinc finish.

DOOR DESIGNS AVAILABLE

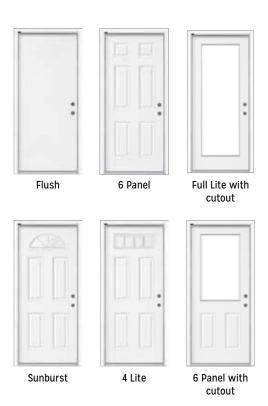

WARRANTY

25 year limited manufacturer's warranty on door slab. 5 year limited manufacturer's warranty on frame and components if painted within 45 days of purchase.





DAKOTA

High-Definition Steel Slab Composite Frame

The Dakota features a composite maintenance-free frame paired with a high definition, bright white steel slab for long-lasting performance at an affordable price. Strength, beauty and security are consolidated in this popular door system.



STEEL SLAB

SIZES: Width: 2/6, 2/8, 2/10, 3/0 - Height: 6/8

STEEL: 24 gauge primed high definition steel, bright white, with primed wood stiles and rails. Polyurethane core with 12" wood lock block.

DRILLING: Available in single or double drilled. Complete with mortised face plate for superior hardware installation.

Available in inswing and outswing.

GLASS

Glass inserts can be factory installed in the 6 Panel 23" x 37" cutout. For designs refer to page 23.

COMPOSITE FRAME

Maintenance free, smooth white composite frame available in 4-9/16" or 6-9/16" jamb depth. Brickmould factory installed.

FRAME CLADDING

Available with white or black aluminum cladding (exterior of jamb only) with optional slimline aluminum brickmould. Not available in outswing units.

WEATHERSEALS

FIXED SILL: Extruded aluminum in mill finish with composite substrate.

SILL GASKETS: Prevents rain penetration and avoids messy caulking.

DOOR SHOE: Premium white vinyl adjustable shoe.


CORNER PAD: Simple solution corner pad helps eliminate air and water leaks.

WEATHERSTRIPPING: Black

HINGES

Ball bearing hinges in zinc finish.

DOOR DESIGNS AVAILABLE

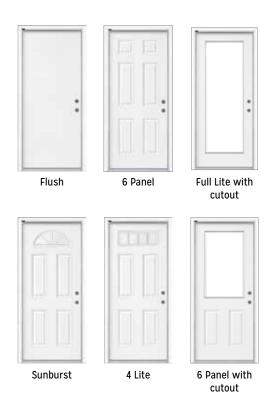

WARRANTY

5 year limited manufacturer's warranty on door slab. 5 year limited manufacturer's warranty on frame and components - no painting required





TITAN

Smooth White Fiberglass Slab Composite Frame

As the flagship of Madero's Entry Series, the Titan provides the best in strength and security with a maintenance-free design. Built specifically to withstand the harsh Canadian climate, it features a maintenance-free fiberglass door with a composite frame. No painting required.



FIBERGLASS SLAB

SIZES: Width: 2/8, 2/10, 3/0 - Height: 6/8

FIBERGLASS: Smooth white pre-pigmented fiberglass, composite stiles and rails, polyurethane core and full length steel reinforced wood lock block.

DRILLING: Available in single or double drilled. Complete with mortised face plate for superior hardware installation.

Available in inswing and outswing.

GLASS

Glass inserts can be factory installed in the 6 panel 23"x37" cutout, or the flush 20"x64" / 22"x64" cutout. For designs refer to page 23.

COMPOSITE FRAME

Maintenance free, smooth white composite frame available in 4-9/16" or 6-9/16" jamb depth. Brickmould factory installed.

FRAME CLADDING

Available with white or black aluminum cladding (exterior of jamb only) with optional slimline aluminum brickmould. Not available in outswing units.

WEATHERSEALS

FIXED SILL: Extruded aluminum in mill finish with composite substrate.

SILL GASKETS: Prevent rain penetration and avoids messy caulking.

DOOR SHOE: Premium white vinyl adjustable shoe.


CORNER PAD: Simple solution corner pad helps eliminate air and water leaks.

WEATHERSTRIPPING: Black

HINGES

Ball bearing hinges in zinc finish.

DOOR DESIGNS AVAILABLE

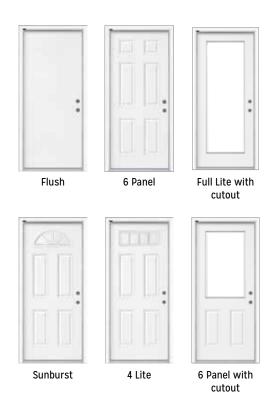

WARRANTY

25 year limited manufacturer's warranty on door slab. 5 year limited manufacturer's warranty on frame and components - no painting required.





WORKHORSE STEEL

SIZES: Width: 2/8, 2/10, 3/0 - Height: 6/8

STEEL: 24 gauge primed high definition steel, bright white, with primed wood stiles and rails. Polyurethane core with 12" wood lock block. Door viewer included.

DRILLING: Inside door can be single or double drilled.

GLASS VENTING INSERT

Outside Door - 22" x 36" Half Vent with dual, clear glass, raises and lowers for increased airflow, and fixed screen.

FRAME

A double rabbeted jamb system accommodates two 1-3/4" door slabs. Choose from kiln dried, finger jointed primed pine or smooth white composite. Available in 4-9/16", 6-9/16" or 8-1/2" jamb depth.

CHECK CHAIN

Frame system includes a check chain to prevent the exterior door from overextending.

ADJUSTABLE STRIKE PLATES

Provides for extra security and allows for on-site adjustments.

WEATHERSEALS

FIXED SILL: Extruded aluminum in mill finish with composite substrate.

SILL GASKETS: Prevent rain penetration and avoids messy caulking.

DOOR SHOE: Premium white vinyl adjustable shoe.

CORNER PAD: Simple solution corner pad helps eliminate air and water leaks.

WEATHERSTRIPPING: Black

HINGES

Ball bearing hinges in zinc finish.

WARRANTY

5 year limited manufacturer's warranty on steel slab; 5 year limited manufacturer's warranty on frame and components if painted within 45 days of purchase. Workhorse SteelComp - no painting required.

WORKHORSE **COMBO**

High Definition Steel Slab **Double Rabbeted Wood Frame**


WORKHORSE STEELCOMP


High Definition Steel Slab Double Rabbeted Composite Frame

DOOR DESIGNS AVAILABLE



HANDING CHART









WORKHORSE FIBERGLASS

SIZES: Width: 2/8, 2/10, 3/0 - Height: 6/8

FIBERGLASS: 6 Panel Smooth white pre-pigmented fiberglass, composite stiles and rails, polyurethane core and full length steel reinforced wood lock block. Door viewer included.

DRILLING: Inside door can be single or double drilled.

GLASS VENTING INSERT

Outside Door - 22" x 36" Half Vent with dual, clear glass, raises and lowers for increased airflow, and fixed screen.

FRAME

A double rabbeted jamb system accommodates two 1-3/4" door slabs. Choose from kiln dried, finger jointed primed pine or smooth white composite. Available in 4-9/16", 6-9/16" or 8-1/2" jamb depth.

CHECK CHAIN

Frame system includes a check chain to prevent the exterior door from overextending.

ADJUSTABLE STRIKE PLATES

Provides for extra security and allows for on-site adjustments.

WEATHERSEALS

FIXED SILL: Extruded aluminum in mill finish with composite substrate.

SILL GASKETS: Prevent rain penetration and avoids messy caulking.

DOOR SHOE: Premium white vinyl adjustable shoe.

CORNER PAD: Simple solution corner pad helps

eliminate air and water leaks.

WEATHERSTRIPPING: Black

HINGES

Ball bearing hinges in zinc finish.

WARRANTY

25 year limited manufacturer's warranty on fiberglass slab; 5 year limited manufacturer's warranty on frame and components if painted within 45 days of purchase. Workhorse FiberComp - no painting required.

COMBO*PLUS*

Smooth White Fiberglass Slab **Double-Rabbeted Wood Frame**


FIBERCOMP


Smooth White Fiberglass Slab **Double-Rabbeted Composite Frame**

DOOR DESIGNS AVAILABLE



HANDING CHART









Garden Patio Doors

Madero Entry Series Garden Patio Doors offers 3 select choices for your new construction or renovation project. All types are offered in a variety of sizes to fit your project. For a more extensive offering, please refer to the Madero Artisan Catalogue or view on madero.ca

BASIC GARDEN PATIO

Let In A Burst of Fresh Air

Garden venting doors feature the active door as a typical swing door (outswing only) with optional sash lock. Product comes complete with standard screen mounted to the inside of the venting door, roto hardware, and sash locks with tie bar. Select left or right handed configuration and specify single or double drill.



Right Hand Outswing Available in Right Hand or Left Hand Outswing. Specify single or double drill.

Clips open for access to exterior of window for easier cleaning.



Screen & Roto Truth Hardware allow the venting side to open for maximum air circulation.



Sash Locks & Tie Bar Locking System provide both extra security, and a weatherseal fit.



BASIC GARDEN PATIO

Venting Garden Doors have the active door as a typical outswing and the venting door opening with awning hardware, allowing for maximum air circulation. The screen is to the interior of the home.

Reno garden doors in 5/0 and 6/0 are the ideal solution for replacing outdated sliding patio doors.

For renovation or new construction, garden doors are also available in 67" or 75" x 81" net frame.

STEEL SLAB

Flush 24 Gauge primed high definition N300 steel, bright white, with primed wood stiles and rails. Polyurethane core with 12" wood lock block.

WOOD FRAME

Kiln dried, finger jointed primed pine available in 4-9/16" or 6-9/16" jamb depth. 180 Step Brickmould is factory installed.

WEATHERSEALS: NAFS COMPLIANT

ZAC SILL: Extruded aluminum in mill finish, thermal break, composite bottom and articulating cap. SILL GASKETS: Prevents rain penetration and avoids messy caulking.

DOOR BOTTOM: The kerf design provides a superior seal

against water, air and dirt.

CORNER PAD: Simple solution corner pad helps

eliminate air and water leaks. WEATHERSTRIPPING: Black

HARDWARE

Complete with removable screen, white awning hardware and two white sash locks.

Garden Renovator*	Net Frame Width
2/8	67" x 81"
3/0	75" x 81"
5/0	59" x 79-1/4"
6/0	71" x 79-1/4"

^{*}Steel door only

Garden Venting



Clear Low-E A perfect choice for the unobstructed view of your outdoor spaces.



Enclosed Mini Blinds Blinds lower neatly within full privacy channels to eliminate light gaps. Low-E coating.



White Grille Glass Between the glass internal 5/8" grilles provide the beauty of a true divided light with ease of cleaning. Low-E glass.



Open Door Units Glass sold separately.



GLASS OPTIONS











Choose From Several Glass Options

Madero's door glass inserts provide an easy do-ityourself project and are a great way to enhance the beauty of your home's entry system.

Door Size	Door Type	Cutout Size	Glass Size
2/8, 2/10, 3/0	6 Panel	23" x 37"	22" x 36"
2/8	Flush	21" x 65"	20" x 64"
2/10, 3/0	Flush	23" x 65"	22" x 64"



CLEAR PL2337-1E RP PL2165-1E RP PL2365-1 LE RP

- · Clear glass
- · Privacy Rating: 1

Glass Size: 22"x36", 20"x64", 22"x64"



9 INTERNAL PL2337-WIF 5/8 RP PL2165-WIF-5/8-E RP PL2365-WIF LE 5/8 RP

- · Clear glass with 5/8" internal grille
- Privacy Rating: 1

Glass Size: 22"x36", 20"x64", 22"x64"



MINI BLIND PL2337-MBRL RP PL2165-MBRL-LE RP PL2365-MBRL-LE RP

- · Clear glass
- · Raise, lower & tilt
- Privacy Rating: 1,5,10

Glass Size: 22"x36", 20"x64", 22"x64"



MARK-12 VENT RP MARK-120 RP MARK-122 RP

- · Clear glass with removable screen
- · Privacy Rating: 1

Glass Size: 22"x36", 20"x64", 22"x64"



BISTRO BISTRO PAT 2236 RP

- · Chinchilla glass, beveled clear glass and diamond glass with patina caming
- Privacy Rating: 5

Glass Size: 22"x36"



ALYS ALYS PVC 2236 RP

- · Sandblasted and V-groove glass
- Privacy Rating: 9

Glass Size: 22"x36"



CELESTE CELESTE PVC 2236 RP

- · Beveled clear glass, small hammered glass, aqualite glass with patina caming
- Privacy Rating: 5

Glass Size: 22"x36"



NOUVEAU NOUVEAU 684-78R4 RP

- · Clear cluster, bevel and glue chip glass with nickel caming
- · Privacy Rating: 6

Glass Size: 22"x36"



CROSSWALK CROSSWALK 684-CWK RP

- · Micro-iced granite with gray and clear softwave glass and nickel caming
- · Privacy Rating: 8

Glass Size: 22"x36"

MADERO'S DOOR GLASS FEATURES:

- · Door glass designs use handcrafted glass in a variety of textures to create dimension, depth, contrast, and privacy while allowing natural light to enter the home.
- · Madero's decorative glass is sealed between two panels of tempered safety glass and insulated for air and water-tight performance.
- · 10 year glass seal warranty.
- C Low-E coating with Argon gas.



PRIVACY RATING

1 - Transparent Objects can be seen clearly through the glass from the other side

5 - Diffused Objects are diffused, but still detectable through the glass from the other side

Only light will travel through the glass from the other side.

PRE-FINISHING OPTOINS **ENTRY SERIES**











ENTRY SERIES

Customize Your Door

Madero's Entry Series door systems have been developed to meet the needs of both residential and commercial environments. Ordered from factory, the add-ons shown below further enhance the door systems for use in your home, garage, shed, or outbuilding.



Self-Closing Hinges

These hinges are placed in the bottom and middle hinge pockets to pull the door shut after it has been opened and released. Tension is to be adjusted on site.




Door Viewer

Allows sight through the door. Cannot be used with any half lite glass options.



GW124 Shoe

Shoes are attached to the bottom of your door to provide draft protection. The PVC and mohair fins provide an air tight seal between the sill and the door.



PP3322 Brickmould

Primed double bead finger joint pine brickmould can replace 180 step brickmould. Specify at time of ordering.



Commercial Sill

Low profile access provides an uninterrupted entry line, allowing ease of mobility for lawnmowers, dollies, etc. Standard sweep not recommended. Net Frame height: 80-1/8". Ideal for sheds, garages & outbuildings.



Commercial Sweep

Designed for use in conjunction with the commercial sill.



Energy Star and/or NAFS Compliant

NAFS Sill, with an articulating cap is required in construction requiring a building permit in most Canadian jurisdictions. ENERGY STAR products are independently certified to save energy without sacrificing features or functionality.

Inswing Net Frame height: 81-11/16" Outswing Net Frame height: 81"



ADAptive Sill System

Low profile access provides for ease of mobility for wheelchairs. See Page 37 for more details.

Net Frame height: 80-3/4"

ADAptive Sill System

Low profile access provides for ease of mobility for wheelchairs. The thermal break in the sill deters frost buildup. An innovative jamb boot supports a weather-tight seal and secure corner assembly. Full length caulking strip eliminates water penetration.





DOOR SPECIFICATIONS

ENTRY SERIES

Steel Doors

Steel doors have been the choice for residential usage for over 50 years. The variety of new panelled designs have maintained the popularity of the steel door.





Madero Import



Finish with Ease

Economy units use a Madero import 24 gaugesteel slab with a primed warm white

finish. Basic and Dakota systems use a N300 primed white finish. Madero systems require no additional paint to



achieve a 5 year limited warranty. Doors can easily be painted to match the style of your home - consider factory pre-finishing for your door and frame.

Durability

24 gauge door skins interlock with the stile, providing additional support to reduce delamination and stretching. Steel door skins will not crack or warp, unlike wood.

Strength

A 12" wood lock block provides additional strength and structure to support most residential hardware.

Energy Efficiency

Filled with an insulating core of 100% CFC free polyurethane foam, providing a superior energy rating over a standard styrene core product.

Cost

Steel entry doors are more affordable compared to wood or fiberglass.



RANGER

High-Definition Steel Slab Wood Frame

ECONOMY

High-Definition Steel Slab Wood Frame

BASIC

High-Definition Steel Slab Wood Frame

DAKOTA

High-Definition Steel Slab Composite Frame

WORKHORSE COMBO

High-Definition Steel Slab Double-Rabbeted Wood Frame


Fiberglass Doors

Built for the Canadian Climate

In 2005, Madero partnered with NanYa Plastics, a world leader in the manufacturing of fiberglass, working with Canadian R & D Corp. to develop a maintenance free door and frame system, which meets the climate conditions found within the Canadian market.

Limited Manufacturer's



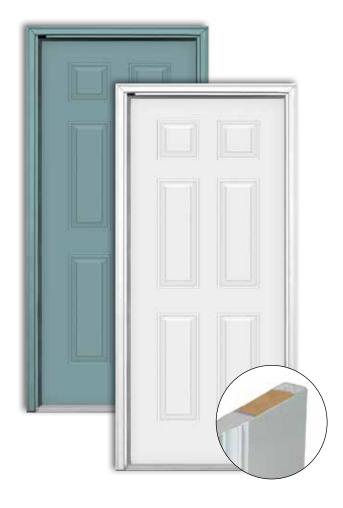

Finish with Ease

Smooth white fiberglass doors are supplied in their natural pre-pigmented warm white finish. Though painting is not required to achieve a full 25 year limited warranty, doors can

easily be painted to the color of your choosing.

To achieve a realistic, rich appearance. Refer to page 25 for factory finish information.

Durability & Performance

Fiberglass skins are resistant to dents, dings, splintering and corrosion. The rigid structure of our fiberglass doors prevent bowing and warping in extreme temperatures.

Exceptional Security

The full length steel reinforced wood lock block offers a high level of security, while allowing a range of hardware mounting options.

Completely Waterproof

Waterproof composite stiles and rails are sealed and finished to protect all edges of the door from moisture penetration, which can harm the inner insulation and cause rotting.

Energy Efficiency

Filled with an insulating core of 100% CFC free polyurethane foam, providing an excellent R rating, while bonding the two door skins together for additional strength.



MAVERICK

Smooth White Fiberglass Slab Wood Frame

Smooth White Fiberglass Slab Composite Frame

WORKHORSE

Smooth White Fiberglass Slab Double-Rabbeted Wood Frame

DOOR FRAMES **ENTRY SERIES**

Simple Solutions® Corner Pad Weatherstripping

Small in size but big in impact. The Simple Solution Corner Pad seals out air and moisture.

Compression weatherstrip seals tight when the door is closed and expands when opened, providing a long-lasting weather-tight solution.





Ball Bearing Hinges

All Madero Entry Series door systems ship complete with 4" x 4" ball bearing hinges. Madero's standard hinge finish is C-2G zinc plated.



Metal Cladding Options

Entry Series available with white or black aluminum cladding (exterior of jamb only). Brickmould options include slimline aluminum brickmould or aluminum clad #3322 double bead wood brickmould.





Cladding not available on outswing.

Snaplock Nailing Fin

(Maerick, Titan, Workhorse SteelComp, Workhorse FiberComp only.) Incorporating a hinge-style design, Madero's SnapLock nailing fin snaps into place for new home construction or can be scored and trimmed if not required.



Wood Frame

Kiln dried, primed finger-joint pine-double primed for quality performance and ease of painting. Wood frame requires paint on all exposed surfaces within 45 days of purchase.



Composite Frame

Pre-pigmented smooth white frame components are a blend of PVC and wood fiber composite substrate. Composite will not discolour, absorb moisture, splinter, or rot. Smooth white composite does not require paint.





What to Know Before You Order

Entry Series doors are available in standard widths and 6'8" door slab heights, with single or double drilling to accommodate levers, knobs, handlesets, and deadbolt hardware. Door handles and deadbolt hardware are sold separately.

Product Comparisons

Entry Series door systems are available in a variety of door slab and frame choices.

	Steel Slab	Fiberglass Slab	Basic Wood Frame	Basic Composite Frame
Economy‡	•		•	
Basic	•		•	
Maverick		•	•	
Dakota	•			•
Titan		•		•
Workhorse Combo	•		•	
Workhorse SteelComp	•			•
Workhorse ComboPlus		•	•	
Workhorse FiberComp		•		•

†Economy door systems are available in a 6 panel inswing design only.

Product Measurements

For 6/8 height

All Entry Series doors are available in 2" x 4" (4-9/16") or 2" x 6" (6-9/16") construction, left hand or right hand application and inswing or outswing. Economy door systems are available as inswing applications only.

	Net Frame	
Entry Series Single Door	Inswing	Outswing
2/6	31-1/2" x 81-11/16"	31-1/2" x 81""
2/8	33-1/2" x 81-11/16"	33-1/2" x 81"
2/10	35-1/2" x 81-11/16"	35-1/2" x 81"
3/0	37-1/2" x 81-11/16"	37-1/2" x 81"

Rough Opening Measurements (RO)

Add 1" to width of net frame Add 1/2" to height of net frame

Outside Measurements of Brickmould (OSM)

Inswing: Add 2-1/2" to width of net frame

Add 1-1/4" to height of net frame

Outswing: Add 3" to width of net frame

Add 1-1/2" to height of net frame

Outside Measurements of Slimline Aluminum (OSM)

Add 15/16" to width of net frame Inswing:

Add 1/2" to height of net frame

Not Available Outswing:

Note: Above measurements comply with the Endura fixed sill system.





M ORDERING CHECKLIST | DESIGNER ENTRY

STEP 1 Product	Steel or fiberglass door, paired with wood or composite frame. BASIC MAVERICK DAKOTA TITAN			
	☐ White ☐ Black (Exterior) & White (Interior) Series (Basic, Dakota only)			
STEP 2 Style	Narrow Lite Clear (Right)Narrow Lite Clear4 Lite Clear4 Lite Frosted5 Lite Clear			
STEP 3	Width: □ 2/8 (32") □ 3/0 (36") Heig	jht: 🗆 6/8 (80")		
Door Specifications	Machining: □ SD (Single Drill) □ DD (Double Drill)			
	Jamb: ☐ 4-9/16" ☐ 6-9/16" ☐ Primed Wood ☐	Smooth White Composite □ White Clad Jamb □ Black Clad Jamb		
	Brickmould: Note: If brickmould is not required, do ☐ Wood 180 Step ☐ Smooth White Composite ☐ Wood 3322 Double Bead ☐ Shipped Loose	e 🗆 Slimline White Aluminum 🗆 Slimline Black Aluminum		
STEP 4 Configurations Options	As viewed from outside:	Left Right Hand		
	Inswing Inswing	Outswing Outswing: N/A with Aluminum Cladding		
STEP 5 Pre-Finishing Options	Choose your finish.	☐ Paint Unit - Both Sides ☐ Paint Unit - Exterior Side Only ☐ Paint Unit - 2 Colours (Please specify below)		
	Cadet Navy Colony Smokey Teal Melon Tangerine Buttercup C	☐ Paint Slab Only - Both Side ☐ Paint Slab Only - Exterior Side Only		
	*If you do not choose a colour on one side of the do	oor unit, it will remain in its natural white or primed product colors.		
Customer Sig	nature:	Date:		
Store Name o	of #:	Tag: PO:		

While Madero makes every effort to ensure the information contained in our brochures is accurate, we do not accept liability for any inaccuracies. Our brochures are subject to change, as well as errors and omissions, without notice or liability. Doors are provided unfinished/unstained and without hardware unless otherwise noted. All photos are for illustration purposes only and depicted doors and frames may not represent Madero products.





STEP 1 Product	Steel or fiberglass door, paired with wood or composite frame. □ ECONONY □ RANGER □ BASIC □ MAVERICK □ DAKOTA □ TITAN □ WHPC □ WHPLUSC □ WHSTCC □ WHFCC		
STEP 2 Style	Economy available in 6 Panel only. Clear Flush 9 Internal Mini Blind Vent Nouveau Crosswalk Bistro Alys Celeste 6 Panel Sunburst 4 Lite 2 Panel Cutout to 23"x37" Cutout to 20"x64" Cutout to 22"x64"		
STEP 3	Width: □ 2/8 (32") □ 2/10(34") □ 3/0 (36") Height: □ 6/8 (80")		
Door Specifications	Machining: □ SD (Single Drill - not available in Economy) □ DD (Double Drill)		
	Jamb: □ 4-9/16" □ 6-9/16" □ Primed Wood □ Smooth White Composite □ White Clad Jamb □ Black Clad Jamb		
	Brickmould: Note: If brickmould is not required, do not check off a box. ☐ Wood 180 Step ☐ Smooth White Composite ☐ Slimline White Aluminum ☐ Slimline Black Aluminum ☐ Wood 3322 Double Bead ☐ Shipped Loose		
STED 1	Choose your door system configuration: Workhorse Combo/Plus door system configuration: (As viewed from the outside)		
STEP 4 Configurations Options	LH In/LH Out Inside of House Left Hand Inswing		
	Outswing Conomy available in inswing only Outswing: N/A with Aluminum Cladding		
STEP 5	Choose your finish. Paint Unit - Both Sides		
Pre-Finishing Options	Paint Unit - Exterior Side Only Paint Unit - 2 Colours (Please specify below)		
	Cadet Navy Colony Smokey Teal Melon Tangerine Buttercup Callente Paint Slab Only - Both Side Paint Slab Only - Exterior Side Only		
	*If you do not choose a colour on one side of the door unit, it will remain in its natural white or primed product colors.		
STEP 6 Add-Ons	□ Commercial Sill □ Commercial Sweep □ GW124 Shoe □ Self-Closing Hinges □ Door Viewer □ NAFS Sill □ ADAPtive Sill System		
Customer Sian	ature: Date:		
Ctoro Nama of			





Artisan Doors



Garden Patio Doors



Larson Catalogue



Interior Doors



Multi-Family



Commercial

Contact us at: madero.ca | canada.orders@madero.ca | 1-800-667-6977

